



Dynapro AT'M

Premium Aggressive All-Terrain for Light truck, VAN & Sport Utility Vehicle



Dynapro AT'M

- 1. Specialty Compound :**
Specialty Compound
- 2. Reinforced Under-tread Gauge**
Helps to prevent internal damage from impacts sustained when off the road.
- 3. Nylon-Reinforced Belts**
Increased Belt durability.
- 4. High-strength Belts**
Improves steering stability and durability.
- 5. Rubber Thickness Reinforced by Inner Liner**
Helps to minimize damage from off-road impact
- 6. Reinforced Carcass and Rubber Gauge**
Improve hill climbing and steering stability both on and off the road.
- 7. Jointless Bead Wire**
Prevents bead separation when driving off-road on low air pressure.

Size & Specifications

Dynapro AT'M / RF10

SIZE	PR	S/W Type	Measuring Rim	Max.Air (PSI)		Max.Load				Overall Diameter		Section Width		Tread Width		Tread Depth		SLR	RPM	
				S	D	(KGS)	(LBS)	S	D	S	D	mm	inch	mm	inch	mm	inch (32)			
85																				
LT215/85R16	115/112R	10	OWL	6.0	80	80	1215	1120	2680	2470	772	30.4	216	8.5	164	6.5	12.6	15.9	357	680
LT235/85R16	120/116R	10	OWL	6.5	80	80	1380	1260	3042	2778	806	31.7	235	9.3	178	7.0	13.1	16.5	371	651
80																				
LT235/80R17	120/117R	10	OWL	6.5	80	80	1400	1285	3085	2835	808	31.8	235	9.3	180	7.1	13.1	16.4	383	653
75																				
LT235/75R15	104/101R	6	OWL	6.5	50	50	900	825	1985	1820	733	28.9	235	9.3	180	7.1	13.1	16.5	338	716
LT225/75R16	115/112S	10	OWL	6.0	80	80	1215	1120	2680	2470	744	29.3	223	8.8	174	6.9	12.6	15.9	345	705
LT245/75R16	120/116S	10	OWL	7.0	80	80	1380	1260	3042	2778	774	30.5	248	9.8	184	7.2	13.1	16.5	358	678
LT265/75R16	112/109R	6	VSB	7.5	50	50	1120	1030	2470	2270	804	31.7	267	10.5	206	8.1	13.1	16.5	370	652
LT265/75R16	123/120R	10	VSB	7.5	80	80	1550	1400	3415	3085	804	31.7	267	10.5	206	8.1	13.1	16.5	370	652
LT285/75R16	127/124R	10	OWL	8.0	80	80	1725	1570	3805	3460	834	32.8	290	11.4	218	8.6	13.1	16.4	383	633
LT315/75R16	121R	8	OWL	8.5	50	-	1450	-	3195	-	878	34.6	314	12.4	244	9.6	13.1	16.5	392	601
LT245/75R17	121/118S	10	OWL	7.0	80	80	1450	1320	3195	2910	800	31.5	248	9.8	188	7.4	12.6	15.8	383	660
70																				
LT265/70R16	110/107R	6	OWL	7.5	50	50	1060	975	2335	2150	778	30.6	272	10.7	204	8.0	13.1	16.5	359	674
LT305/70R16	124/121R	10	OWL	9.0	65	65	1600	1450	3525	3195	834	32.8	312	12.3	236	9.3	13.1	16.5	374	633
LT245/70R17	119/116R	10	OWL	7.0	80	80	1360	1250	3000	2755	776	30.6	248	9.8	188	7.4	13.1	16.4	383	680
LT265/70R17	121/118S	10	OWL	7.0	80	80	1450	1320	3195	2910	804	31.7	270	10.6	204	8.0	12.6	15.8	383	656
LT285/70R17	126/123S	10	OWL	7.0	80	80	1700	1550	3750	3415	832	32.8	294	11.6	220	8.7	13.1	16.4	383	634
LT315/70R17	121/118R	8	OWL	9.5	50	50	1450	1320	3195	2910	874	34.4	316	12.4	244	9.6	13.1	16.4	383	604
65																				
LT275/65R18	123/120S	10	VSB	8.0	80	80	1550	1400	3415	3085	815	32.1	279	11.0	212	8.3	13.1	16.4	383	647
• LT325/65R18	127/124S	10	VSB	9.5	65	65	1750	1600	3860	3525	879	34.6	331	13.0	250	9.9	12.6	15.9	398	600
• LT275/65R20	126/123S	10	VSB	8.0	80	80	1700	1550	3750	3415	829	32.6	279	11.0	212	8.3	12.6	15.9	378	636
60																				
• LT325/60R18	124/121S	10	VSB	9.5	65	65	1600	1450	3525	3195	847	33.3	331	13.0	250	9.8	12.6	15.9	385	623
• LT325/60R20	126/123S	10	VSB	9.5	65	65	1700	1550	3750	3415	898	35.4	331	13.0	250	9.8	12.6	15.9	405	587
55																				
• LT305/55R20	121/118S	10	VSB	9.5	65	65	1450	1320	3195	2910	844	33.2	316	12.4	234	9.2	12.6	15.9	384	625
• LT285/55R20	122/119S	10	VSB	9.0	80	80	1500	1360	3305	3000	822	32.4	297	11.7	220	8.7	12.6	15.9	375	642
50																				
• LT325/50R22	122S	10	VSB	10.0	65	65	1500	-	3305	-	917	36.1	336	13.2	250	9.8	12.6	15.9	413	575
30X9.50R15LT																				
30X9.50R15LT	104R	6	OWL	7.5	50	-	900	-	1990	-	750	29.5	240	9.4	184	7.2	13.1	16.5	350	699
31X10.50R15LT																				
31X10.50R15LT	109R	6	OWL	8.5	50	-	1020	-	2250	-	775	30.5	268	10.6	206	8.1	13.1	16.5	358	677
33X12.50R15LT																				
33X12.50R15LT	108R	6	OWL	10.0	35	-	1000	-	2205	-	826	32.5	318	12.5	244	9.6	13.1	16.5	386	635

Technical data subject to change without prior notice. • These sizes will be available in 2007 * VSB : Vertical Serrated Band * OWL : Outlined White Letter

Dynapro AT^M


Premium Aggressive All-Terrain for Light truck, VAN & Sport Utility Vehicle



Rugged Puncture Resistance
Wraparound tread gives tire a rugged look and guards against cuts, bruises and impact breaks. Affords outstanding traction especially in muddy or snowy conditions.

Tread Pattern
The sharp edge patterned after tiger's teeth creates an aggressive, bold look balanced block design

CAMS (Computer Aided Measurement System)

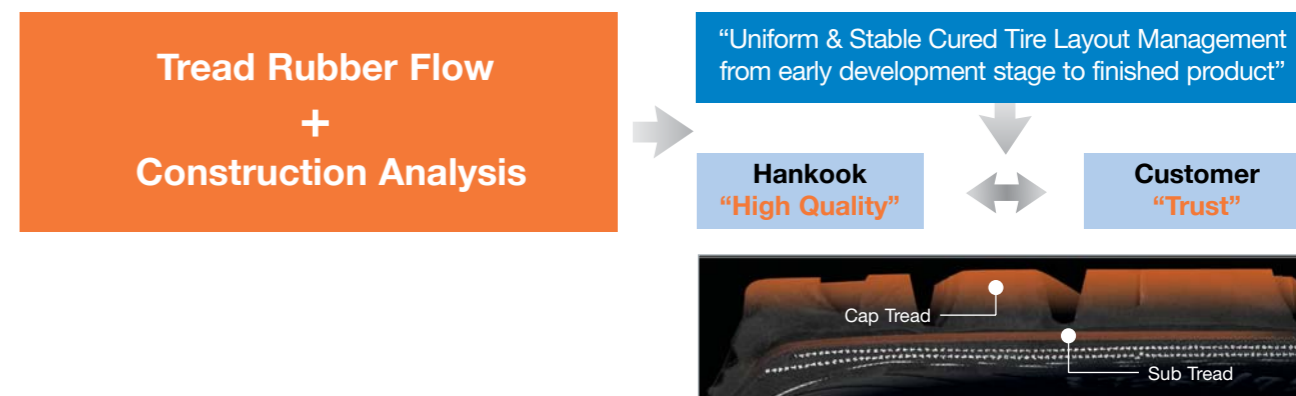


Design Features / Benefits

Wave Kerf
Deep two step sipes extend tread life and increases performance on wet road.

Zigzag Block Edge
Provided superb grip in wet, icy and dry conditions.

Stone Ejector
Stone ejectors in the center and shoulder grooves help prevent tire damage from stones or external impacts and enhances handling confidence.

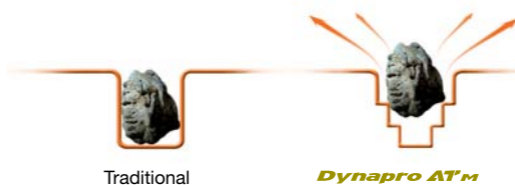

Scallop Grooves (Patent pending)
The "Scallop grooves" between the tread blocks increase the tire's 'biting' edges to enhance traction on the off-road.

Angled Side Groove
Enhances wet traction has self-cleaning function by pushing out mud.

Test Result

